


| CELL / MODEL NAME | DESCRIPTION | DATE |
|--------------------------|---|-------------|
| MONOTUBE-1 | Single monotube sign structure - elevation and notes | 06/01/2012 |
| MONOTUBE-2 | Single monotube sign structure - details and foundation | 08/21/2013 |
| DUALTUBE-1 | Double monotube sign structure - elevation and notes | 06/01/2012 |
| DUALTUBE-2 | Double monotube sign structure - details and foundation | 08/21/2013 |

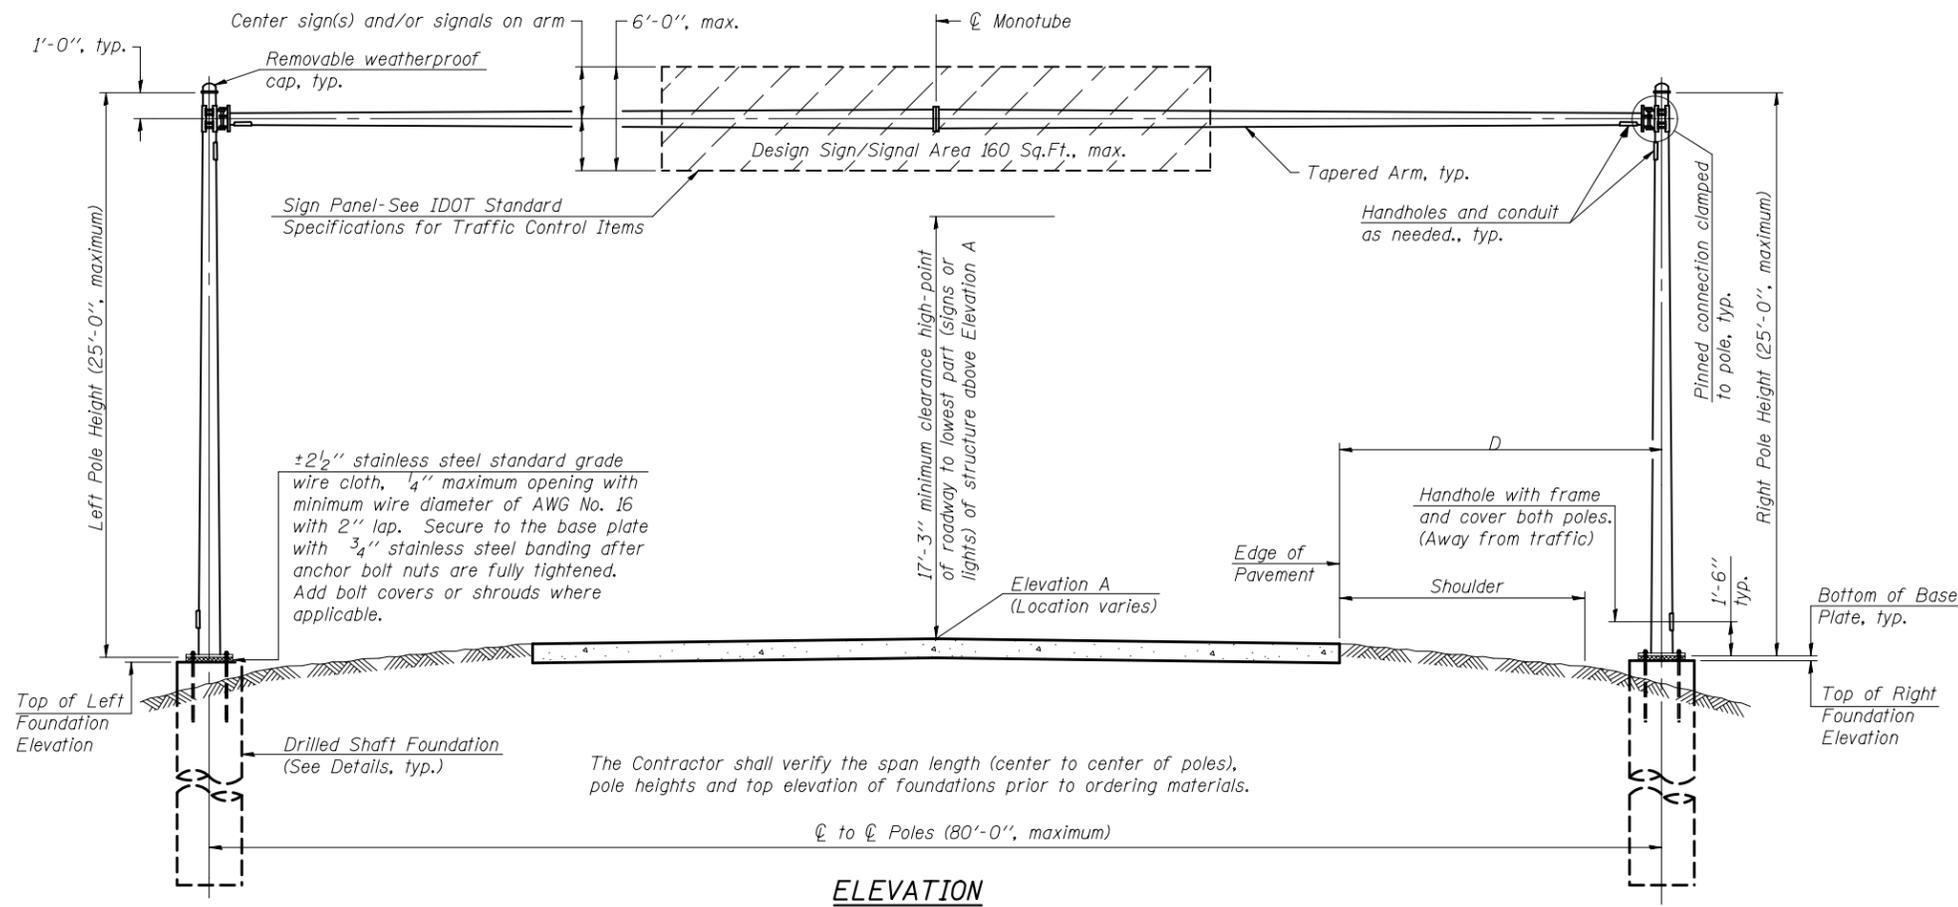

GENERAL NOTES

DESIGN: Current (at time of letting) AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals (Fatigue Category II - natural wind gust only).

CONSTRUCTION: Current (at time of letting) Illinois Department of Transportation Standard Specifications for Road and Bridge Construction, Supplemental Specifications and Recurring Special Provisions. ("Standard Specifications") All references to "Mast Arm Assembly and Pole" are applicable, unless otherwise noted.

WELDING: All welds to be continuous unless otherwise shown. All welding to be done in accordance with current AWS D1.1 Structural Welding Code and the Standard Specifications.

ANCHOR RODS: Shall conform to ASTM F1554 Grade 105. No welding shall be permitted on rods.

FASTENERS: All connection bolts shall be High Strength Bolts M164, Galvanize M232 (A153), Type 3, or stainless steel heavy hex conforming to ASTM A193, Grade B8 or B8M, Class 1. U-bolts shall be produced from ASTM A276 Type 304, 304L, 316 or 316L, Condition A, cold finished, or an equivalent material acceptable to the Engineer. Nuts for stainless steel bolts shall be stainless steel conforming to ASTM A194, Grade 8 (AISI Type 304) or Grade 8F (AISI Type 303). All nuts shall be "locknuts" with nylon or steel inserts and semifinished hexagonal heads equivalent to the finished heavy hex series of the American National Standard. Washers for stainless steel bolts shall be stainless steel conforming to ASTM A240, Type 302 or 304.

REINFORCEMENT BARS: Reinforcement Bars designated (E) shall be epoxy coated in accordance with the Standard Specifications.

CAMBER: Minimum AASHTO camber = $L / 1000 + \text{dead load camber}$.

FOUNDATIONS: The contract unit price for Drilled Shaft Concrete Foundations shall include reinforcement bars complete in place.

ELEVATION
 Looking at face of signs.
 Looking upstation for structures with signs both sides.

SIGN STRUCTURE DATA TABLE

| Structure Number | Station | C to C Poles | Elevation A | Dimension D | Actual Sign/Signal Area | Left Foundation | | | | | Right Foundation | | | | | Class SI Concrete (Cu. Yds.) | |
|------------------|---------|--------------|-------------|-------------|-------------------------|-----------------|--------------|---|---|---|------------------|--------------|---|---|---|------------------------------|--|
| | | | | | | Elevation Top | Elev. Bottom | A | B | F | Elevation Top | Elev. Bottom | A | B | F | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |

BILL OF MATERIAL

| ITEM | UNIT | TOTAL |
|---|----------|-------|
| OVERHEAD SIGN STRUCTURE MONOTUBE SINGLE | Foot | |
| DRILLED SHAFT CONCRETE FOUNDATIONS | Cu. Yds. | |


MONOTUBE - 1 6-1-12

| | | | | | | | | | | | |
|-------------|-------------|--------------|---------|---|--------------------------------|---------------------------|---------|--------|--------------|-----------|--|
| FILE NAME = | USER NAME = | DESIGNED - | REVISED | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | MONOTUBE SIGN STRUCTURE | F.A. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. | |
| | | CHECKED - | REVISED | | | CONTRACT NO. | | | | | |
| | | DRAWN - | REVISED | | | ILLINOIS FED. AID PROJECT | | | | | |
| | | PLOT SCALE = | REVISED | | | SHEET NO. OF SHEETS | | | | | |
| | | PLOT DATE = | REVISED | | | | | | | | |

⌀ anchor rod. Thread upper 8". Galvanize upper 18" per AASHTO M232. Provide one hexagon locknut and washer (top) and one leveling nut and washer (bottom). Galvanize per AASHTO M232. Nuts shall each be tightened against base plate with 200 lb.-ft. torque.

⌀ 3" ⌀ galvanized steel conduit. Thread and cap both ends.

Limits of Concrete Sealer (Cost included in "Drilled Shaft Concrete Foundations")

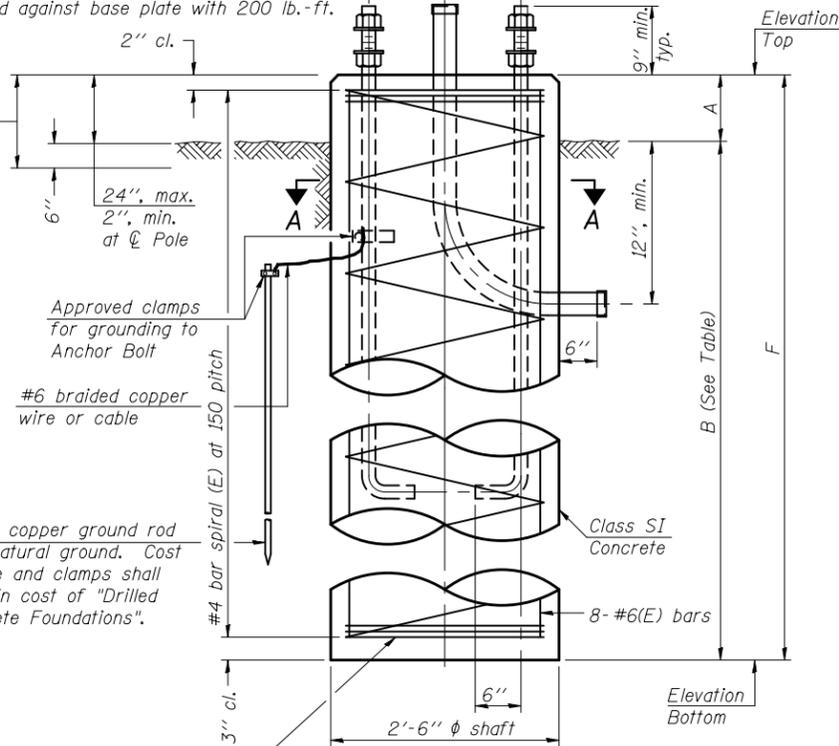

Approved clamps for grounding to Anchor Bolt

#6 braided copper wire or cable

3/4" x 8'-0" copper ground rod driven into natural ground. Cost of rod, cable and clamps shall be included in cost of "Drilled Shaft Concrete Foundations".


#4 bar spiral (E) at 150 pitch

3" cl.

3 hoops minimum top and bottom

FOUNDATION DETAILS

Typical, except conduit may only be required at one foundation. Provide conduit openings both poles.

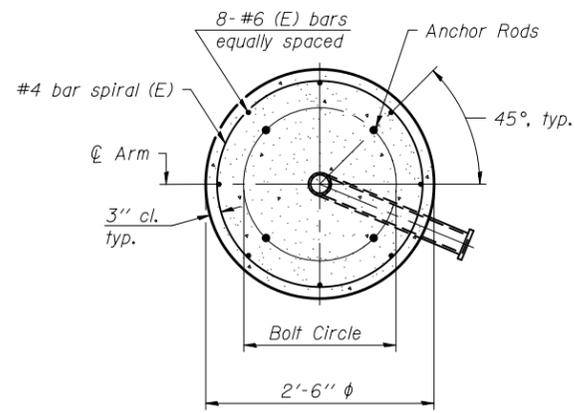

SECTION A-A

| Foundation Design Table | |
|-------------------------|---------|
| Span (Ft.) | B (Ft.) |
| Span ≤ 45 | 9 |
| 45 < Span ≤ 65 | 10 |
| 65 < Span ≤ 80 | 11 |

FOUNDATIONS:

The foundation dimensions shown are based on the presence of mostly cohesive soils with an average Unconfined Compressive Strength (Qu) of at least 1.25 tsf, which must be determined by previous soil investigations at the jobsite. When other conditions are indicated, the boring data will be included in the plans and the foundation dimensions shown will be the result of site specific designs.


If the conditions encountered are different than those indicated, the Contractor shall notify the Engineer to determine if the foundation dimensions need to be modified. If dimensions "B" or "F" are revised by more than 12" by the Contractor, "as-built" plans shall be prepared and submitted to the District Bureau of Operations for future reference.

No sonotubes or decomposable forms shall be used below the lower conduit entrance. Permanent metal forms or other shielding may not be left in place below that elevation without the Engineer's written permission.


Concrete shall be placed monolithically, without construction joints.

Backfill shall be placed per Article 502 of Standard Specification and prior to erection of support column.

A normal surface finish followed by a Concrete Sealer application will be required on concrete surfaces above the lowest elevation 6" below finished ground line. Cost included in Drilled Shaft Concrete Foundation.

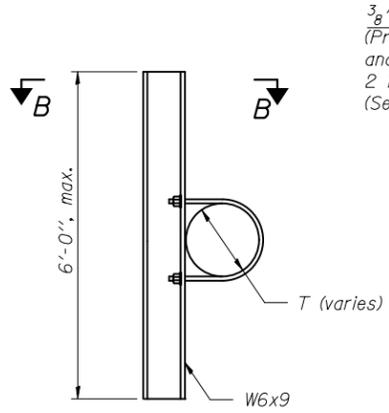


SIGN MOUNTING BRACKET
(Minimum 2 Brackets Each Sign)

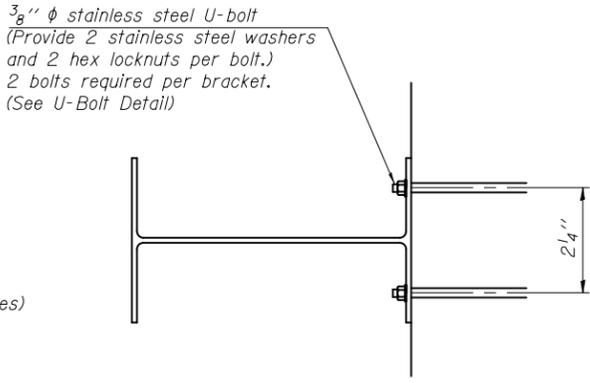

SECTION B-B

6'-0" maximum spacing.
2'-0" maximum sign overhang beyond end bracket.

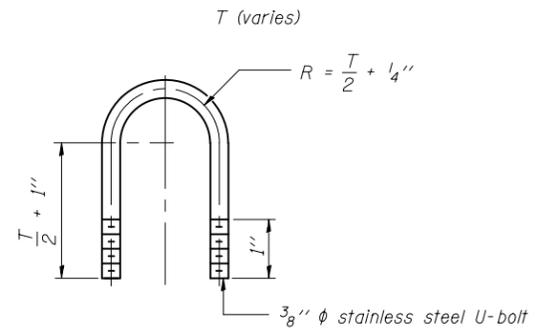

U-BOLT DETAIL
(Typical)


MONOTUBE - 2 8-21-13

| | | | |
|-------------|-------------|------------|-----------|
| FILE NAME = | USER NAME = | DESIGNED - | REVISED - |
| | | CHECKED - | REVISED - |
| | | DRAWN - | REVISED - |
| | | CHECKED - | REVISED - |

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MONOTUBE SIGN STRUCTURE
FOUNDATION AND SIGN BRACKETS

| | | | | |
|---------------------------|---------|--------|--------------|-----------|
| F.A. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| | | | | |
| CONTRACT NO. | | | | |
| ILLINOIS FED. AID PROJECT | | | | |

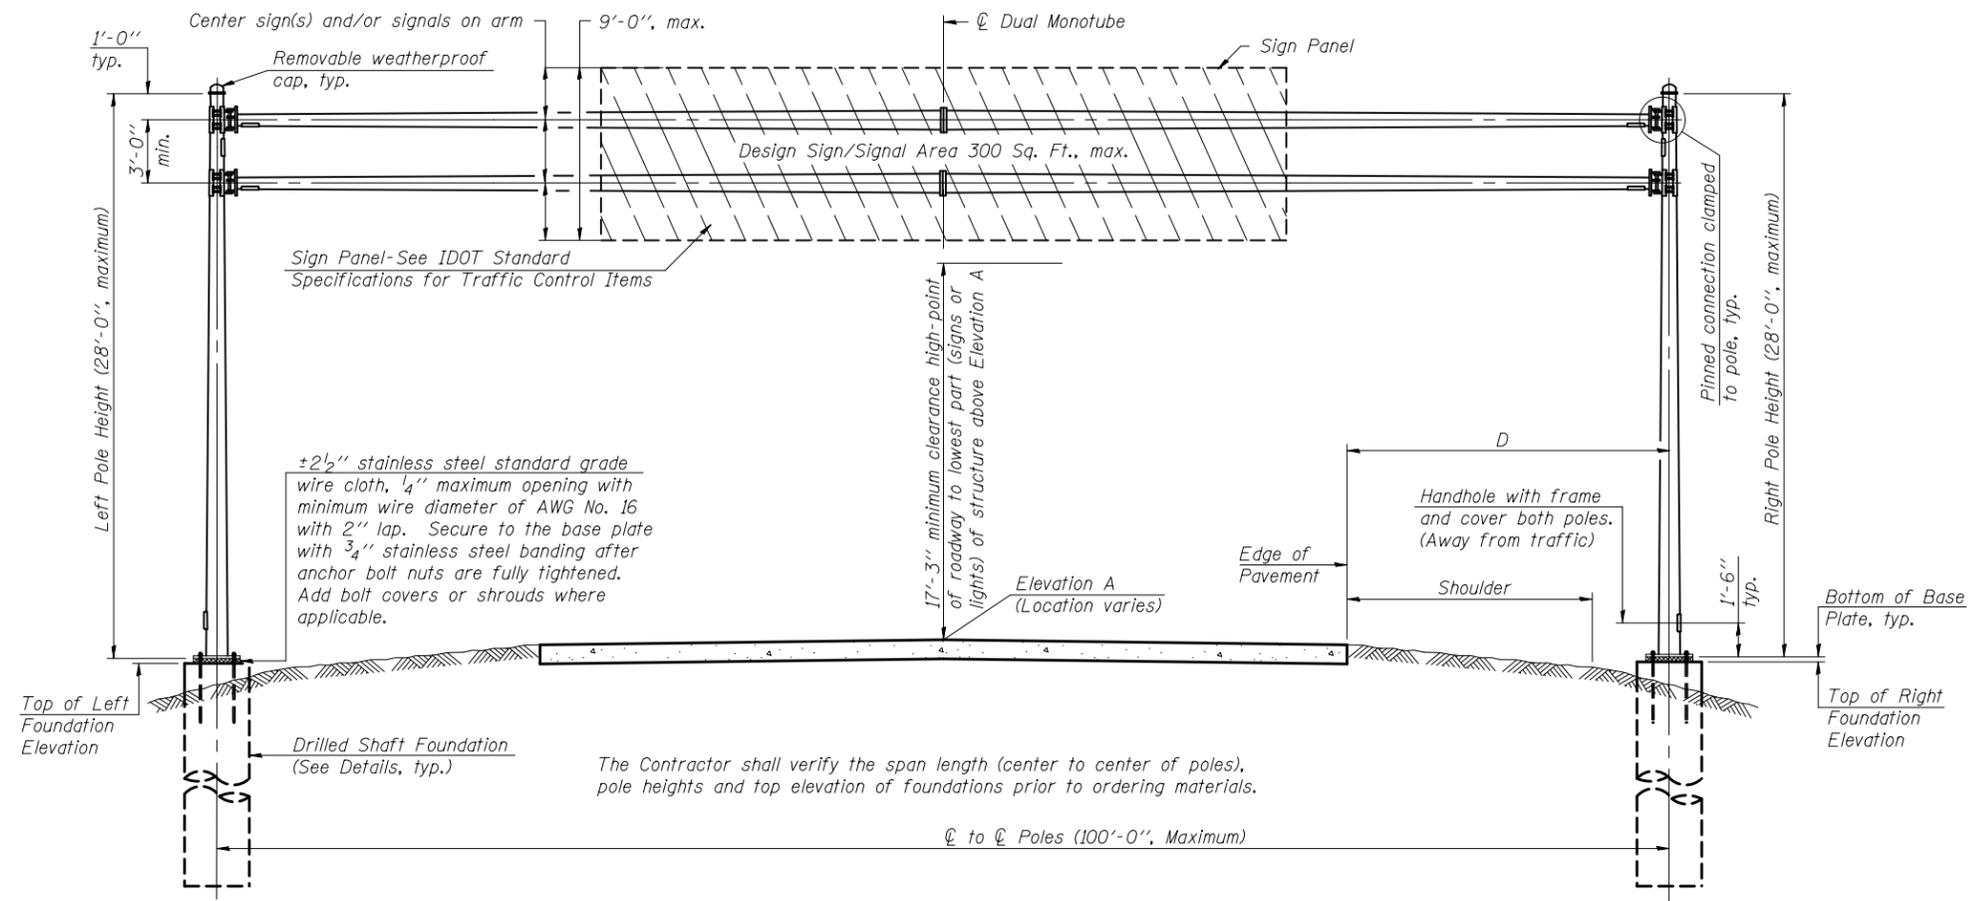

GENERAL NOTES

DESIGN: Current (at time of letting) AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals (Fatigue Category II - natural wind gust only).

CONSTRUCTION: Current (at time of letting) Illinois Department of Transportation Standard Specifications for Road and Bridge Construction, Supplemental Specifications and Recurring Special Provisions. ("Standard Specifications") All references to "Mast Arm Assembly and Pole" are applicable, unless otherwise noted.

WELDING: All welds to be continuous unless otherwise shown. All welding to be done in accordance with current AWS D1.1 Structural Welding Code and the Standard Specifications.

ANCHOR RODS: Shall conform to ASTM F1554 Grade 105. No welding shall be permitted on rods.

FASTENERS: All connection bolts shall be High Strength Bolts M164, Galvanize M232 (A153), Type 3, or stainless steel heavy hex conforming to ASTM A193, Grade B8 or B8M, Class 1. U-bolts shall be produced from ASTM A276 Type 304, 304L, 316 or 316L, Condition A, cold finished, or an equivalent material acceptable to the Engineer. Nuts for stainless steel bolts shall be stainless steel conforming to ASTM A194, Grade 8 (AISI Type 304) or Grade 8F (AISI Type 303). All nuts shall be "locknuts" with nylon or steel inserts and semifinished hexagonal heads equivalent to the finished heavy hex series of the American National Standard. Washers for stainless steel bolts shall be stainless steel conforming to ASTM A240, Type 302 or 304.

REINFORCEMENT BARS: Reinforcement Bars designated (E) shall be epoxy coated in accordance with the Standard Specifications.

CAMBER: Minimum AASHTO camber = $L / 1000 + \text{dead load camber}$

FOUNDATIONS: The contract unit price for Drilled Shaft Concrete Foundations shall include reinforcement bars complete in place.

ELEVATION
Looking at face of signs.
Looking upstation for structures with signs both sides.

SIGN STRUCTURE DATA TABLE

| Structure Number | Station | ℄ to ℄ Poles | Elevation A | Dimension D | Actual Sign/Signal Area | Left Foundation | | | | | Right Foundation | | | | | Class SI Concrete (Cu. Yds.) |
|------------------|---------|--------------|-------------|-------------|-------------------------|-----------------|--------------|---|---|---|------------------|--------------|---|---|---|------------------------------|
| | | | | | | Elevation Top | Elev. Bottom | A | B | F | Elevation Top | Elev. Bottom | A | B | F | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |

BILL OF MATERIAL

| ITEM | UNIT | TOTAL |
|---------------------------------------|----------|-------|
| OVERHEAD SIGN STRUCTURE MONOTUBE DUAL | Foot | |
| DRILLED SHAFT CONCRETE FOUNDATIONS | Cu. Yds. | |
| | | |


DUALTUBE - 1 6-1-12

| | | | | | | | | | | | |
|-------------|-------------|------------|---------|---|-------------------------------------|---------------------------|---------|--------|--------------|-----------|--|
| FILE NAME = | USER NAME = | DESIGNED - | REVISOR | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | DUAL MONOTUBE SIGN STRUCTURE | F.A. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. | |
| | | CHECKED - | REVISOR | | | | | | | | |
| | | DRAWN - | REVISOR | | | SHEET NO. OF SHEETS | | | | | |
| | | CHECKED - | REVISOR | | | ILLINOIS FED. AID PROJECT | | | | | |

Ø anchor rod. Thread upper 8". Galvanize upper 19" per AASHTO M232. Provide one hexagon locknut and washer (top) and one leveling nut and washer (bottom). Galvanize per AASHTO M232. Nuts shall each be tightened against base plate with 200 lb-ft torque.

Ø 3" Ø galvanized steel conduit. Thread and cap both ends.

Limits of Concrete Sealer (Cost included in "Drilled Shaft Concrete Foundations")

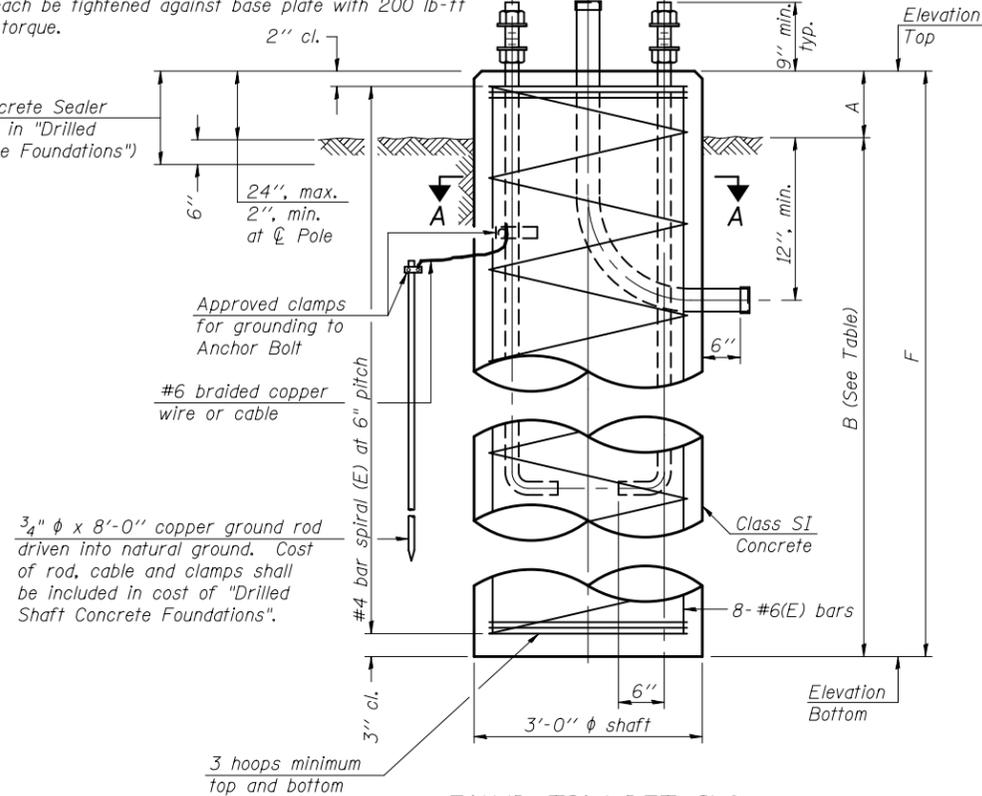

| Span (Ft.) | B (Ft.) |
|-----------------|---------|
| Span ≤ 65 | 12 |
| 65 < Span ≤ 85 | 13 |
| 85 < Span ≤ 100 | 14 |

FOUNDATIONS:

The foundation dimensions shown are based on the presence of mostly cohesive soils with an average Unconfined Compressive Strength (Qu) of at least 1.25 tsf, which must be determined by previous soil investigations at the jobsite. When other conditions are indicated, the boring data will be included in the plans and the foundation dimensions shown will be the result of site specific designs.

If the conditions encountered are different than those indicated, the Contractor shall notify the Engineer to determine if the foundation dimensions need to be modified. If dimensions "B" or "F" are revised by more than 12" by the Contractor, "as-built" plans shall be prepared and submitted to the District Bureau of Operations for future reference.

No sonotubes or decomposable forms shall be used below the lower conduit entrance. Permanent metal forms or other shielding may not be left in place below that elevation without the Engineer's written permission.


Concrete shall be placed monolithically, without construction joints.

Backfill shall be placed per Article 502 of Standard Specification and prior to erection of support column.


A normal surface finish followed by a Concrete Sealer application will be required on concrete surfaces above the lowest elevation 6" below finished ground line. Cost included in "Drilled Shaft Concrete Foundation".

FOUNDATION DETAILS

Typical, except conduit may only be required at one foundation. Provide conduit openings both poles.

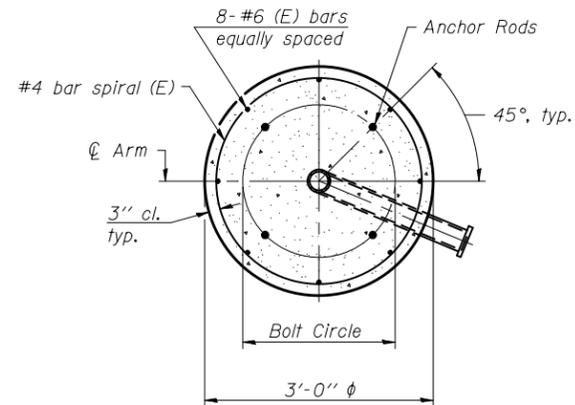


SECTION A-A

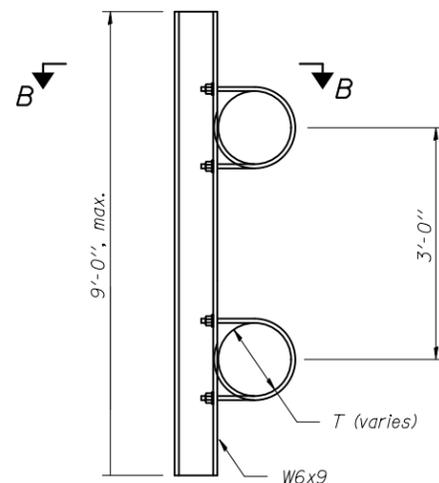


SIGN MOUNTING BRACKET

3/8" Ø stainless steel U-bolt (Provide 2 stainless steel washers and 2 hex locknuts per bolt.) 2 bolts required per bracket. (See U-Bolt Detail)

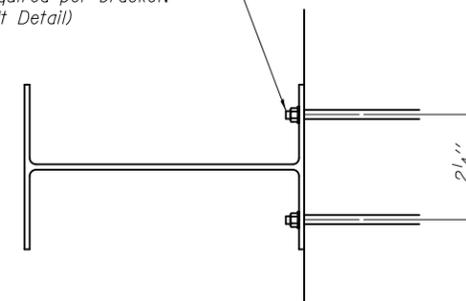

SECTION B-B

6'-0" maximum spacing. 2'-0" maximum sign overhang beyond end bracket.

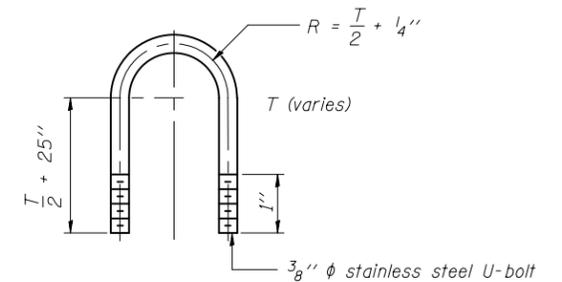

U-BOLT DETAIL (Typical)

DUALTUBE - 2 8-21-13

| | | | |
|-------------|-------------|------------|-----------|
| FILE NAME = | USER NAME = | DESIGNED - | REVISED - |
| | | CHECKED - | REVISED - |
| | | DRAWN - | REVISED - |
| | | CHECKED - | REVISED - |

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DUAL MONOTUBE SIGN STRUCTURE

| | | | | |
|---------------------------|---------|--------|--------------|-----------|
| F.A. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| | | | | |
| CONTRACT NO. | | | | |
| ILLINOIS FED. AID PROJECT | | | | |